

140W USB-C POWER INJECTOR



POWER + VIDEO + DATA

The MP-200UPI is a 140W USB-C power injector designed to combine USB-C power delivery with DisplayPort Alt Mode video and high-speed USB data connectivity. The supplied manual specifies up to 4K@60Hz 4:4:4 video and up to 10Gbps USB data.


140W	4K@60Hz	10Gbps	PD 3.1
Power Injection	4:4:4 Video	USB Data Rate	Power Delivery

Key Features

Feature	Capability
PD 3.1	140W injection
DisplayPort Alt Mode	4K@60Hz 4:4:4 video
USB 3.2 Gen 2	Up to 10Gbps data rate
USB-C OUT	Switchable power
Firmware	Upgrade via USB-C
USB-C IN	Locking hole provided

Product image shown above is taken from the supplied MP-200UPI manual and presented prominently for product identification.

SYSTEM CONNECTION

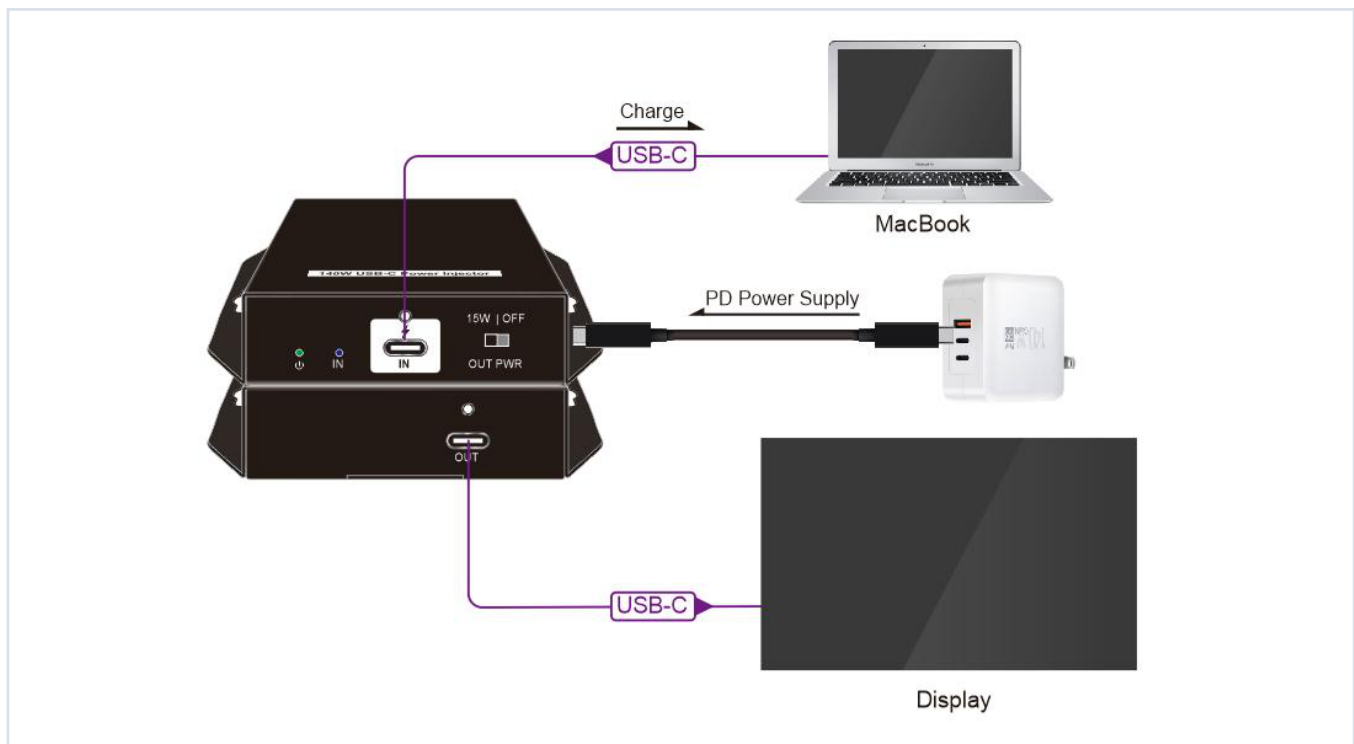

The system diagram on page 2 of the supplied manual shows a USB-C laptop connection, PD power supply connection to the injector, and USB-C connection to a display.

Technical Specifications

Specification	Details
Input	1 × USB-C
Output	1 × USB-C
Video Input	Up to 4K@60Hz 4:4:4
Video Output	Up to 4K@60Hz 4:4:4
USB Data Rate	10Gbps
Device Power	0 / 15W
PD Standard	PD 3.1
Power Consumption	3W (exclude USB device load)
Dimensions	70(W) × 20(H) × 90(D) mm
Net Weight	165g
Operating Temperature	-5 ~ +55 °C
Storage Temperature	-25 ~ +70 °C
Relative Humidity	10% ~ 90%

PACKAGE CONTENTS

- 1 × MP-200UPI
- 1 × User Manual

Source: MP-200UPI User Manual, Version 2025V1.0. All technical values above are reproduced from the supplied manual.