

MP-VMIX10S-PRO

All-in-One Video Mixer Switcher



**1080P
60FPS**

**Horizontal
and Vertical**

Inputs&Outputs

Inputs&Outputs

3 Audio Ports

**Multiple
Storages**

**NDI
SRT
RTMP**

Milestone Pro MP-VMIX10S-PRO is an all-in-one professional live streaming switcher, built for versatility and high-quality production. It features a bright 5.5-inch FHD screen for intuitive control and monitoring.

- **Inputs:** MP-VMIX10S-PRO handles flexible, multi-format sources with a total of up to 8 inputs. This includes 4 SDI inputs and 4 HDMI inputs. Crucially, the first two HDMI ports support HDMI 2.0 for connecting up to 4K resolution sources.

- **Outputs:** It provides ample connectivity with two HDMI outputs and one SDI output. All three outputs are fully customizable—they can be configured to display the Input Channel, Preview (PST), Program (PGM), or Multi-view (MV) feed.

- **Audio:** Supports two external audio inputs for professional mixing.

- **Monitoring:** Users can monitor the mixed audio output or any single audio channel in real time, ensuring perfect sound quality for the broadcast.

- **Streaming & Recording:**

Direct Streaming: Stream directly to your platform using the Ethernet port via your stream key and URL.

UVC Integration (Webcam Mode): Connect to a PC via the UVC port, and MP-VMIX10S-PRO is instantly recognized as an HD webcam.

Multi-Function Input

1. MP-VMIX10S-PRO has a Built-in Media Player for Direct Playback&As an Input Source.
2. The multi-function input could Directly Play media video sources from a USB Disk or connect a UVC Camera without a converter.
3. It also supports NDI, SRT, and RTMP protocols, and Stream Remote Video Sources to the switcher and use them as Input Sources for local live streaming.
4. 4 HDMI + 4 SDI Ports, Choose Four-Channel Input from 8 Channels, scale from Simple Webcasts to Multi-Cam Productions.



Pro Dual-Channel Streaming: Computer-Free.

Direct Dual Stream: Built-in Encoder for YouTube, Facebook&TikTok.

Advanced Multi-source Layout Creation

Dual-Orientation Streaming: Supports simultaneous Horizontal and Vertical live streaming outputs.


PTZ Control Agnostic: Camera control functions remain fully operational in both horizontal and vertical streaming modes.

Simultaneous Live Broadcast & Recording: Achieve maximum security by simultaneously broadcasting your stream and recording the Program (PGM) output.

High-Quality Recording: Supports direct 1080P@60fps video recording to SD, USB, or HDD. The recorded PGM file is production-ready, minimizing post-editing time.



Connectivity Overview

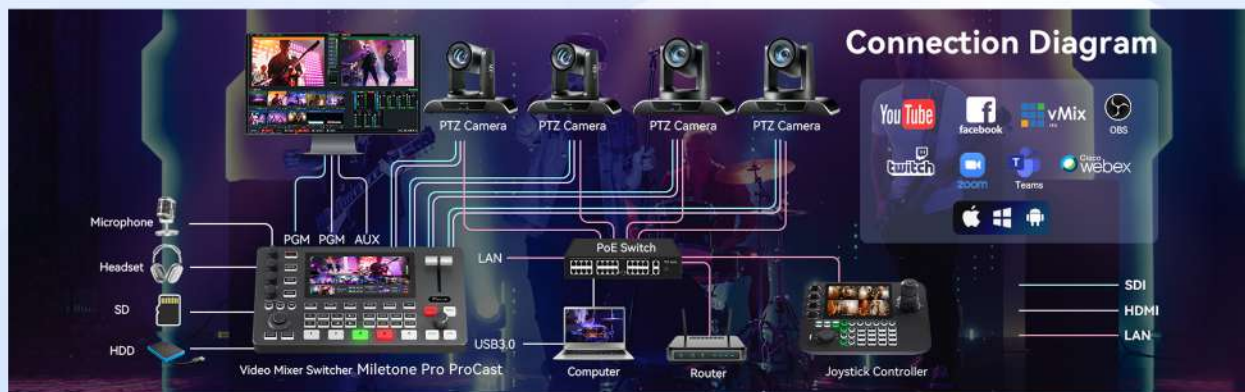

Simplified PTZ Workflow & Chroma Key

Easily manage and switch between 4 PTZ cameras to deliver compelling, multi-angle live streams without complexity. Uses an advanced AI algorithm for precise color sampling, ensuring clean, sharp edges and effective elimination of color spill when using a green screen.

Professional Layout Engine & 36 Pro Effects

Create sophisticated outputs with two separate PIP boxes and two logo overlays, allowing you to seamlessly integrate graphics and multiple live feeds for dynamic, news-style broadcasting.

Access 36 dynamic transition effects to elevate the look of your live production.

Instant Switching: Use the CUT button for immediate switches (PST to PGM), or press AUTO for smooth, automated transitions with effects.

Intuitive Layer Modes: The MODE switch lets you control layers: T-Bar mode is used for Preview (PST) layers, while EAZY mode manages Program (PGM) layers.

Fine-Tuning: Customize your transitions by adjusting the transition time, blackout duration, and edge feathering.

Professional Audio Mixer

Supports AFV and MIX audio modes. Manages 4 HDMI + 2 external inputs simultaneously, with dedicated headphone monitoring.



Seamless NDI Input

Integrate high-quality, low-latency video streams directly over a single network cable, simplifying complex setups and reducing cable clutter.

Model	MP-VMIX10S-PRO		
Screen	5.5 inch		
Resolution	1920*1080		
Decoding Capability	Supports H.264 Max 1080p60fps		
Protocols	SRT, RTMP, RTSP, VISCA, NDI		
Features	Integrated 8-choose-4 channel input from 4x SDI & 4x HDMI Supports USB-A USB 3.0 lossless capture for more authentic image reproduction Supports 4K input, allowing flexible integration of multiple video sources Supports NDI input, low-latency video over a single network cable Supports UVC cameras and remote camera input for versatile composite input Built-in media player; recorded videos can be played directly onboard and used as an input source Supports PGM output and MV output with variable channels Supports onboard recording to USB flash drives , SD card and portable HDDs Supports screen rotation (landscape/portrait) to adapt to various scenarios Built-in web server, supports control via web browser on any platform Connect via Ethernet, input stream keys for dual-stream pushing Supports language settings; Supports network upgrade; Supports static MAC address		
System			
I/O Configuration	Input	3G-SDI*4 HDMI 2.0*2 HDMI 1.3*2 USB 2.0*1 (USB Type-A)	SDI 1080P Input Interface HDMI 4K Input Interface HDMI 1080P Input Interface Video Playback/Image Loading/UVC Input
	Output	3G-SDI*1 HDMI 1.3*1 HDMI 1.3*1 USB 3.0*1 (USB Type-C)	PGM Output PGM Output PGM/MV Multiplexed Output UVC Output Interface
	Audio	MIC IN 2*3.5mm Audio Interface PHONES 1*3.5mm Audio Interface	Compatible with MIC/LINE Stereo Input Monitor Output
	Control	LAN *1	Network Control/Network Streaming PTZ Camera Control
Input Resolution	HDMI	SMPTE: (IN1/IN2) 3840x2160@30/50/60 1920x1080@23.98/24/25/29.97/30/50/59.94/60 1680x1050@60 1600x1050@60 1440x900@60 1366x768@60 1360x768@60 1280x1024@60 1280x800@60 1280x768@60 1024x768@60 1080p@24/30/50/60 1080i@50 720p@50/60	
Input Resolution	HDMI USB 3.0	SMPTE: 1080p@24/30/50/60 720p@50/60 Video Streaming: 1080p@24/30/50/60 720p@50/60	
SD Card Slot	SD Card Recording	Input Power	12V/2A
USB Port	USB Drive Recording	Constant Power	20W
Video Sampling	YUV 4:4:4	Operating Temperature	0°C~70°C
System Latency	< 3 Frames	Operating Humidity	10%~85%
Audio Delay	0-500ms (0-30/25 frames)	Weight	1.5kg(Net Weight) 2.1kg(Gross Weight)
		Unit Dimensions	269.9*166.4*55.7mm

Tel: +912267987577
 Email: info@milestonepro.co.in
 Address: A-3029/A-3090, 3rd Floor, Bhandup Industrial Estate, L.B.S Marg,
 Bhandup (W), Mumbai-400078, India